



  
**TRUSTED  
IMPORTERS** 



# SC PACKAGING

**Importers of Packaging Machines**





**QIAODASHENG**

## CONTINUOUS BAND SEALER

### FRB-770

Continuous Band Sealer

#### Technical Parameters

Model	FRB-770
Voltage	AC220V/50Hz 110V/60Hz
Transmission Power	60W
Sealing Electric Power	2x300W
Sealing Speed	0-21 m/min
Sealing Width	6-12mm
Temperature Range	0-300 °C
Sealing Center To Conveyor Station	10-40 mm
Single Film Max Thickness	<0.4 mm
Single Maximum Load Weight	<1 k g
Total Maximum Load Weight	<3 k g
Dimensions	L840xW380xH270mm
Machine Weight (kg)	21



### FRB-770II

Vertical Continuous Band Sealer

#### Technical Parameters

Model	FRB-770II
Voltage	AC220V/50Hz 110V/60Hz
Transmission Power	60W
Sealing Electric Power	2x300W
Sealing Speed	1-21 (1-30)m/min
Sealing Width	6-12mm
Temperature Range	0-300
Sealing Center To Conveyor Station	120-280mm
Single Film Max Thickness	<0.4 mm
Conveyor Size	830x150mm
Total Maximum Load Weight	<3 k g
Dimensions	L840xW380xH560mm
Machine Weight (kg)	26



### ZWX-1000LD

Heavy Duty Air Flushing Band Sealer

#### Technical Parameters

Model	ZWX-1000LD
Power Supply	AC220V/50Hz
Power	500W
Sealing Speed	0-12m/min
Sealing Width	6-12mm
Temperature Range	0-300°C
Printing Letters	<45 pcs
Conveyor Loading	<3kg
Dimensions	900x480x380mm
Machine Weight (kg)	45





QIAODASHENG

## CONTINUOUS BAND SEALER

### FRB770Q

Nitrogen Filling Continuous Band sealer

#### Technical Parameters

Model	FRB770Q
Voltage	AC220V/50Hz 110V/60Hz
Transmission Power	60W
Sealing Electric Power	2x300W
Sealing Speed	0-21 m/min
Sealing Width	6-12mm
Temperature Range	0-300°C
Sealing Center To Conveyor Station	10-40 mm
Single Film Max Thickness	<0.4 mm
Single Maximum Load Weight	<1 k g
Total Maximum Load Weight	<3 k g
Dimensions	L840xW380xH270mm
Machine Weight (kg)	30



### FR-1100V

Heavy Duty Continuous Band sealer

#### Technical Parameters

Model	FRB-770II
Voltage	110/220V/50-60Hz
Transmission Power	120W
Sealing Electric Power	1.235W
Sealing Speed	0-12m/min
Sealing Width	6-12mm
Temperature Range	0-300
Single Film Max Thickness	<0.8 mm
Total Maximum Load Weight	<15 k g
Dimensions	L1243xW580xH1228mm
Machine Weight (kg)	80



### FRD-1370LD

Heavy Duty Continuous Band sealer

#### Technical Parameters

Model	FRD-1370LD
Power Supply	AC220V/50Hz
Power	120W
Sealing Speed	0-12m/min
Sealing Width	8-12mm
Temperature Range	0-300°C
Conveyor Dimension	1475x250
Conveyor Loading	<25kg
Machine Weight (kg)	120





QIAODASHENG

**AUTOMATIC SEALING CUTTING SHRINK  
PACKAGING MACHINE**

# **AUTOMATIC L SEALER + HOT AIR CIRCULATION SHRINK MACHINE FQL450+BS4522N**



## **Technical Parameters**

Model	BS4522N	BS5530LN
Power Supply	380V 50/60HZ	380V 50/60HZ
Power	12KW	16KW
Size Of Shrink Oven	1200x450x220mm	1600x550x300mm
Conveying Speed	0-10m/min(Adjustable)	0-10m/min(Adjustable)
Conveying Weight	30kg	30kg
Material	PVC POF PP	PVC POF PP
Dimensions	1600x700x1370mm	2000x800x1450mm
Machine Weight (kg)	160	200

Model	FQL-450A	FQL-550A
Power Supply	220V 50/60HZ	220V 50/60HZ
Power	1.35KW	1.35KW
Highest Packaging	140mm	140mm
Seal Tangent Size	560x440mm	660x540mm
Production Capacity	15-30bags/min	15-30bags/min
Air Pressure	0.5Mpa	0.5Mpa
Dimensions	1650x920x1450mm	1860x1020x1550mm
Machine Weight (kg)	300	350



**QIAODASHENG**

**AUTOMATIC SEALING CUTTING SHRINK  
PACKAGING MACHINE**

# **AUTOMATIC SIDE SEALER + HOT AIR CIRCULATION SHRINK MACHINE BF550+BS5530LN**



## **Technical Parameters**

Model	BS5530LN	BS6530LN	Model	Bf550	BF-650
Power Supply	380V 50/60HZ	380V 50/60HZ	Power Supply	220V 50/60HZ	220V 50/60HZ
Power	16KW	17KW	Power	1.35KW	1.35KW
Size Of Shrink Oven	1600x550x300mm	1600x650x300mm	Highest Packaging	220mm	180mm
Conveying Speed	0-10m/min(Adjustable)	0-10m/min(Adjustable)	Seal Tangent Size	Length unlimited x 550mm	Length unlimited x 650mm
Conveying Weight	30kg	30kg	Production Capacity	15-30bags/min	15-30bags/min
Material	PVC POF PP	PVC POF PP	Air Pressure	0.5Mpa	0.5Mpa
Dimensions	2000x800x1450mm	2000x900x1450mm	Dimensions	1850x1020x1550mm	2050x1120x1550mm
Machine Weight (kg)	200	220	Machine Weight (kg)	350	400



QIAODASHENG



## Shrink Tunnel Machine

### Technical Parameters

Model	BS 3015	BS4525A	BS4535LA	BS6535LA
Power Supply	220/50	220/380V 50/60Hz	380V 50/60HZ	380V 50/60HZ
Power	4.5	6.5KW	9.6KW	15KW
Size Of Shrink Oven	800x300x150 Fix Hight	900x450x250mm(Adjustable)	1200x450x350mm(/Adjustable)	1200x650x350mm(/Adjustable)
Conveying Speed	0-10m/min(Adjustable)	0-10m/min(Adjustable)	0-10m/min(Adjustable)	0-10m/min(Adjustable)
Conveying Weight	10kg	10kg	30kg	30kg
Material	PVC POF PP	PVC POF PP	PVC POF PP	PVC POF PP
Dimensions	?	1300x650x830mm	1600x650x830	1600x850x830
Machine Weight (kg)	70	103	127	162



**QIAODASHENG**

# SINGLE CHAMBER VACUUM PACKAGING MACHINE



## DZ 400/2D

Single-Chamber Vacuum Machines  
(Relay Type Mode)

### Technical Parameters

#### Stainless- Steel Vacuum Chamber

Chamber Size	440x420x75mm
Single Sealing- Bar	400x10mmx2(DZ(Q)400/A)
Single Sealing- Bar	400x10mmx1(DZ(Q)400/B)
Capacity	20m3/h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	540x490x960mm
Machine Weight (kg)	67





## DZ 500/2D

Single-Chamber Vacuum Machines  
(Relay Type Mode)

### Technical Parameters

#### Stainless- Steel Vacuum Chamber

Chamber Size	520x520x75mm
Single Sealing- Bar	500x10mmx2(DZ(Q)500/A)
Single Sealing- Bar	500x10mmx1(DZ(Q)500/B)
Capacity	20m3/h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	650x570x960mm
Machine Weight (kg)	84





## DZ 600/2D

Single-Chamber Vacuum Machines  
(Relay Type Mode)

### Technical Parameters

#### Stainless- Steel Vacuum Chamber

Chamber Size	620x620x75mm
Single Sealing- Bar	600x10mmx2(DZ(Q)600/A)
Single Sealing- Bar	600x10mmx1(DZ(Q)600/B)
Capacity	20m3/h
Cycle Time	10-25sec
Voltage	220V/50HZ
Power	0.9KW
Machine Size	750x670x980mm
Machine Weight (kg)	110





QIAODASHENG

# DOUBLE CHAMBER VACUUM PACKAGING MACHINE



## DZ 500/2SB

## DZ 600/2SB

Double Chamber Vacuum Packaging Machine



Model	DZ500/2SB	DZ600/2SB
Single Sealing- Bar	500x10mmx4(DZ500/2SB/A)	600x10mmx4(DZ600/2SB/A)
Single Sealing- Bar	500x10mmx2(DZ500/2SB/B)	600x10mmx2(DZ600/2SB/B)
Capacity	40m <sup>3</sup> /h	40m <sup>3</sup> /h
Cycle Time	10-40sec	10-40sec
Voltage	380V/50HZ	380V/50HZ
Power	0.9KW	0.9KW
Machine Size	1200x720x920mm	1400x720x920mm
Machine Weight (kg)	152	165

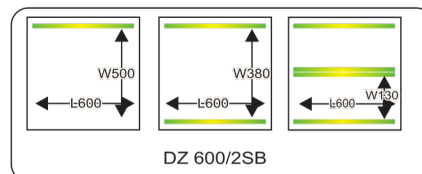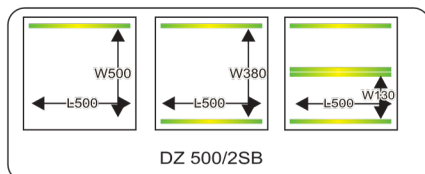



QIAODASHENG

# VACUUM MACHINE/CODER/PRINTER

## DZ 260

Vacuum Packing Machines (Mini Table Model)

### Technical parameters

Stainless-steel Vacuum Chamber	
Chamber Size	390x280x50 mm
Single Sealing- Bar	260x8 mmx1
Capacity	10m <sup>3</sup> /h
Cycle Time	10-20sec
Voltage	220V/50HZ
Power	0.4KW
Machine Size	540x340x360mm
Machine Weight (kg)	31



## MY 380

Batch Coder

### Technical parameters

Model	MY 380
Voltage (V/Hz)	220/50 Ac220/50Hz
Power (w)	180
Printing Position	60x250(W/L)
Printing Speed (Pcs/min)	100
Object Size (mm)	L-50-500 W:30 ~ 300
Printing Type	Solid Ink coding
Dimension (LxWxH)(mm)	440x465x300
Machine Weight (kg)	26



## BENTSAI Hand Printer

### Technical Parameters

Model	BENTSAI Hand Printer
Ink Type:	Fast dry Solvent ink
Printer Ink Cartridge Color	Black
Printing Accuracy	Up to 600DPI
Printing Fonts	Vector font, Dot Matrix Font
Picture Support Format	PNG, JPEG, BMP
Printer Weight(with battery)	450g





QIAODASHENG

## SEMI AUTOMATIC L SEALER/WEB SEALER WITH SHRINK TUNNEL/SHRINK CHAMBER

# WEB SEALER

### Technical Parameters

Model	6540(Web Sealer)	5540L(Shrink Tunnel)
Voltage (V/Hz)	300 / 50 3-Phase	300 / 50 (3-Phase)
Power Consumption (Kw)	1.5	21
Packing Speed (Pcs/min)	0.12	0 ~ 10
Max Packing Dimension	500x290x380(LxWxH)(mm)	1450x550x400
Max Sealing Length (mm)	650	
Height Of Conveyor (mm)	800+50 (Adjustable)	
Working Airpressure (Kg/f/m2)	6	
Dimension (LxWxH) (mm)	1370x920x1800	25500x850x1500
Conveyor Loading (Kg)		40
Heating Time (Minutes)		10
Cooling Time (Minutes)		15
Machine Weight (kg)	700	300



# L-SEALER

### Technical Parameters

Model	5045M (Manual)	5045S (Semi Auto)
Voltage (V/Hz)	AC 220/50	AC 220/50
Power (kw)	1.0	1.2
Packaging Dimension (pcs./h)	300-500	800-1200
Max Packaging Dimension (LxWxH)(mm)	450x400x250	450x400x300
Max Sealing Dimension (LxWxH)(mm)	500x450	500x450
Dimension (LxWxH)(mm)	1560x700x1100	1560x757x1040
Body	Powder coated (M.S. Type)	Powder coated (M.S. Type)
Machine Weight (kg)	80	110



# SHRINK CHAMBER

### Technical Parameters

Model	5540M (Manual)
Voltage (V/Hz)	AC 220/50
Power (kw)	4.0
Packaging Dimension (Pcs./h)	700~1000
Max Packaging Dimension (LxWxH)(mm)	
Max Sealing Dimension (LxWxH)(mm)	450x300x250
Dimension (LxWxH)(mm)	1985x720x1080
Body	Powder coated (M.Type)
Machine Weight (kg)	140





QIAODASHENG

# CARTON SEALER MACHINES

## CARTON SEALER Upper And Lower Drive Tape Sealing Machine

### Technical Parameters

Model	FXJ-6050I
Sealing Capacity	About 1,000 Standard Cases Per Hour
Adhesive Tape Used	Bopp, PVC adhesive tape
Width Of Adhesive Tape	36/48/60/72mm
Power Sources	200V, 50HZ 180W
Max. Sealing Size	W500xH600mm
Min. Sealing Size	



## CARTON SEALER Side Driving Sealing Machine

### Technical Parameters

Model	FXJ-5050 II
Sealing Capacity	About 1,000 Standard Cases Per Hour
Adhesive Tape Used	Bopp, Pvc Adhesive Tape
Width Of Adhesive Tape	36/48/60/72mm
Power Sources	220V, 50HZ 370W
Max. Sealing Size	W500xH500mm
Min. Sealing Size	W140xH150mm





QIAODASHENG

# SEMI AUTOMATIC STRAPPING MACHINE

## Semi-Automatic Strapping Machine

### Technical Parameters

<b>Model</b>	<b>SC006</b>
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 35kg



## Semi-Automatic Strapping Machine

### Technical Parameters

<b>Model</b>	<b>SC007</b>
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 35-40kg



## Semi-Automatic Strapping Machine

### Technical Parameters

<b>Model</b>	<b>SC009</b>
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 40- 55kg





QIAODASHENG

# SEMI AUTOMATIC STRAPPING MACHINE

## Semi-Automatic Strapping Machine

### Technical Parameters

Model	SC010
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 55 kg



## Semi-Automatic Strapping Machine

### Technical Parameters

Model	SC306
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 40- 55kg



## Semi-Automatic Strapping Machine

### Technical Parameters

Model	JN770 TAIWAN
Power Supply	220 VAC
Machine Weight	100kg
Strapping Tension	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm Adjustable
Bundle/Box Weight	Upto 65kg
Made In	TAIWAN





QIAODASHENG



## Semi-Automatic Strapping Machine

### Technical Parameters

Model	JN770 TAIWAN
Power Supply	1 Phase, 110/220V, 50/60Hz
Strap Width	120kg
Strapping Tension Range	70kg
Strapping Speed	1.5/Sec
Strap Width	6-15mm
Bundle/Box Weight	Upto 80kg
Made In	TAIWAN

## S2001

Automatic Strapping Machine

### Technical Parameters

Model	Automatic S 2001
Max. Strap Size (mm)	850x600
Min. Strap Size (mm)	80x50
Strapping Speed (seconds)	2
Strap Width (mm)	9 15
Strap Force (newton)	25 - 700
Working Table Height (mm)	830
Power Source (v/hz)	440 / 50, 0.1.2HP
External Dimension (mm)	1420x650x1565
Machine Weight (kg)	235



## S450/S650

Foot Sealer

### Technical Parameters

Model	S450 (Impulse Type)	S650 (Impulse Type)
Sealing Length (mm)	450	650
Sealing Width (mm)	2 ~ 5	2 ~ 5
Input Voltage (v/hz)	220/50	220 / 50
Heating Time (sec.)	0 ~ 2.5	0 ~ 2.5
Impulse Power (w)	1250	1500
Case Size (mm)	550x520x880	700x570x880
Machine Weight (kg)	21	24



## S2500

Box Stretch Wrapping Machine

### Technical Parameters

Model	Box Stretch Wrapper
	APBW 650
Max. Wrapping Size(LxWxH)(mm)	600x600x600
Wrapping Efficiency (Lords/Hour)	20~40
Turntable Speed (Rpm/min)	3~20
Turntable Diameter (mm)	H : 690
Turntable Loading (Max) (kg)	50
Electrical Requirement (V/Hz)	220 / 50
Power (kw)	Turntable:0.75 Film Carriage:0.4; Steel Tower:0.37
Film Carriage	Pre-Stretch Type
Control System	PLC
Top Plate Device	Pneumatic Type Top Plate
Machine Dimension (mm)	600x4170x1800
Machine weight (kg)	260





QIAODASHENG

# Liquid Filler/ Paste Filler / Particle Filer

## S100/S500/S1000/L

Liquid Filling Machine

### Technical Parameters

Model	S100 ml	S500 ml	S1000 ml
Voltage (V/Hz)	220/50	220/50	220/50
Power (W)	20	20	20
Gas Pressure (Mps)	0.4-0.5	0.4-0.6	0.4-0.6
Filling Range (ml)	10-100	50-500	100-1000
Filling Capacity (Times / min)	10-18	10-18	10-18
Filling Accuracy	≤1%	≤1%	≤1%
External Dimensions(LxWxH)(cm)	100x50x105	100x50x105	100x50x105
Machine Weight (kg)	35	40	40



## S100/S500/S1000/L

Paste Filling Machine

### Technical Parameters

Model	S100 ml	S500 ml	S1000 ml
Voltage (V/Hz)	220/50	220/50	220/50
Power (W)	20	20	20
Gas Pressure (Mps)	0.4-0.5	0.4-0.6	0.4-0.6
Filling Range (ml)	10-100	50-500	100-1000
Filling Capacity (Times / min)	10-18	10-18	10-18
Filling Accuracy	≤1%	≤1%	≤1%
External Dimensions	100x50x105	100x50x105	100x50x105
Machine Weight (kg)	35	40	40



## Granule Filler / Particle Filling Machine

### Technical Parameters

Model	FZ10-999GM	FZ0-99GM
Voltage (V/Hz)	220 V	220V
Power (W)	180 W	220W
Frequency	50-60 Hz	50HZ/110V 60HZ
Type of Product	Semi-Automatic	Semi-Automatic
Speed	Bags 10-15/min	Bags 10-15/min





QIAODASHENG


# Induction Machine and Labeling Machine

## S 2000

Continuous Eelectro Magnetic Induction

### Technical Parameters

Model	S 2000
Voltage(V/Hz)	AC 220/50
Power (W)	2000
Heal Diameter (mm)	20-130
Delivering Speed	2-12 m/min
Vessel Height	40-400mm
Dimension (LxWxH) (mm)	1150x480x400
Machine weight (kg)	38

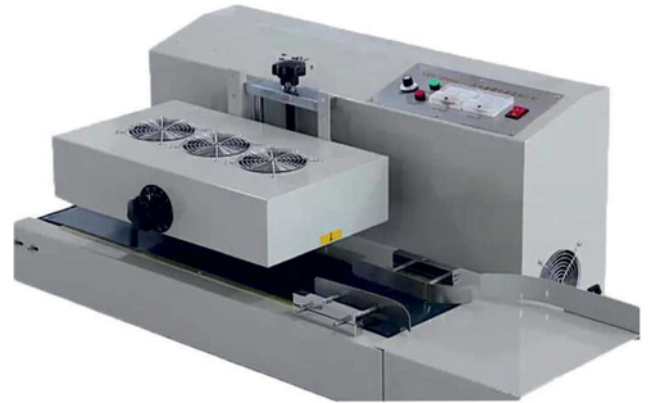

## S700A/S700C

Eelectro Magnetic Induction Capper

### Technical Parameters

Model	S700A
	(Manual Model)
Voltage(V/Hz)	AC 220/50
Power (W)	500
Heal Diameter (mm)	20-100
Delivering Speed	N/A
Vessel height	Absoluteness
Dimension (LxWxH) (mm)	340x290x150
Capacity	0-100 pc. / min
Machine Weight (kg)	5



## Round Bottle Labeling Machine

Model	SC306
Power Supply	220 VAC
Bottle Type	Round
Usage/Application	Sticker Labelling
Driven Type	electricity





50K+  
Trusted Clients

**zomato**



**SC PACKAGING**

Importers of Packaging Machines



+91 9873313700 +91 9773900225  
+91 9810946136, +91 9773904455



[www.scpackaging.co.in](http://www.scpackaging.co.in)



[sales@scpackaging.co.in](mailto:sales@scpackaging.co.in)



**Delhi:** Street 17, Khasra No-1121 Rithala Village,  
Rohini New Delhi-110085



**Chennai:** Plot A Andarkuppam  
Near Theyyambakkam Bus Stop  
Red Hills Rd, Chennai, Tamil Nadu 600060

